mr.steam®

• Programmable time

• Eight user presets per profile

• AromaSteam, ChromaSteam and Audio

• Passcode to prevent unintentional use of

Includes AromaSteam Steamhead

• Popular music and video apps pre loaded

• Compatible with iSteam App


• Low voltage operation

• Eight user profiles

controls

steam bath

TECHNICAL SPECIFICATIONS

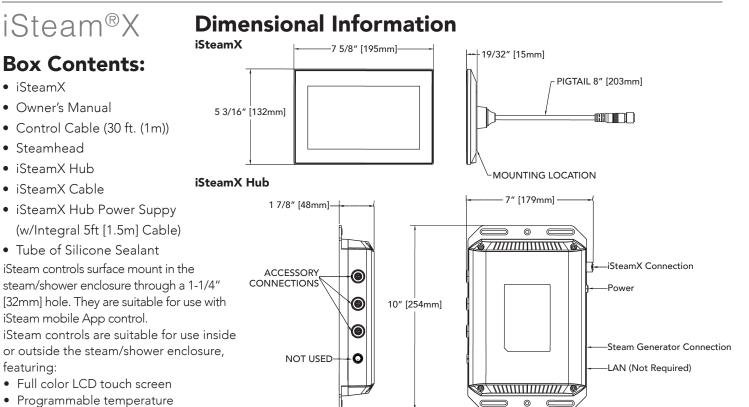

The iSteam controls are designed to be installed inside or outside the steam room but is primarily installed inside the steam room. If the control is installed inside the steam room the control must be located:

- 4-5 ft. (1.2 1.5m) above the floor
- In a location representative of the desired steam bathing temperatures near the bather seating area. Do not locate the control above or near the steamhead or direct steam emissions.
- On a vertical wall

The control cable and the hub cable length are 30 ft. (9m) each. Insure that the control and/or steam generator are located accordingly. An optional 60 ft. (18m) cable versions are available if required. If the control is installed outside the steam room a Remote Temperature Probe Part Number MSTS must be installed inside the steam room.

FOR ILLUSTRATIVE PURPOSES ONLY. IMPORTANT NOTE: FOR SAFE AND TROUBLE FREE INSTALLATION

visit mrsteam.com before installation to download the Installation, Operation and Maintenance Manual or refer to the manual provided with the unit.

MODEL	FINISH	PROJECT INFORMATION
iSteamX	BB Brushed Bronze	Location:
	BL Brilliant Black	Architect:
	BN Brushed Nickel	
	MB Matte Black	Engineer:
	NB Nouveau Bronze	Contractor:
	OB Oil Rubbed Bronze	Submitted By:
	PB Polished Brass	
COLOR	PC Polished Chrome	Date:
	PG Polished Gold	Notes:
	PN Polished Nickel	
	SN Satin Nickel	
	ST Satin Steel	
	WH White Finish	

mr.steam hello@mrsteam.com • www.mrsteam.com

43-20 34th Street, Long Island City, NY 11101 tel: 1 800 76 STEAM • 9410 S. La Cienega Blvd. Inglewood CA 90301 tel: 1 800 72 STEAM